

HALO POP




WHITE (RAL 9016)



DESCRIPTION: RECESSED LED PANEL
LIGHT DISTRIBUTION TYPE: DIRECT
MATERIAL: POWDER PAINTED ALUMINUM, OPAL
COLOUR: WHITE

GENERAL DATA: MAINS VOLTAGE: 220-240V
LED LIFETIME, H: 100 000/L80B10
COLOR CONSISTENCY: 3-STEP MACADAM
WARRANTY : 5 WARRANTY
INGRESS PROTECTION CODE: IP44
AVAILABLE DRIVERS: ON / OFF, DALI
LUMINARE OUTPUT (LM): 1800 - 6900
SYSTEM POWER (W): 15-51
COLOR TEMPERATURE (K) 3000K, 3500K, 4000K

INSTALLATION: ON THE CEILING
ENVIRONMENT: INDOOR, WET SPACES

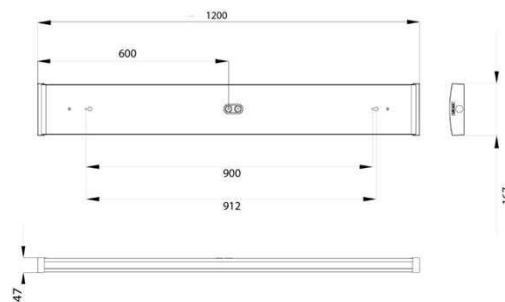

Product	System Power (W)	System Luminous Flux (lm)	Color temperature (K)	Dimensions (PxLxK/S, mm)
HALO POP L120 4700lm FX RS	35	2700 - 4900	3000 - 4000	1200x167x47
HALO POP L120 4700lm FX	35	2700 - 4900	3000 - 4000	1200x167x47
HALO POP L60 3200lm FX RS	25	1800 - 3200	3000 - 4000	600x167x47
HALO POP L60 3200lm FX	25	1800 - 3200	3000 - 4000	600x167x47

